




Technical File

Myriad Dimi

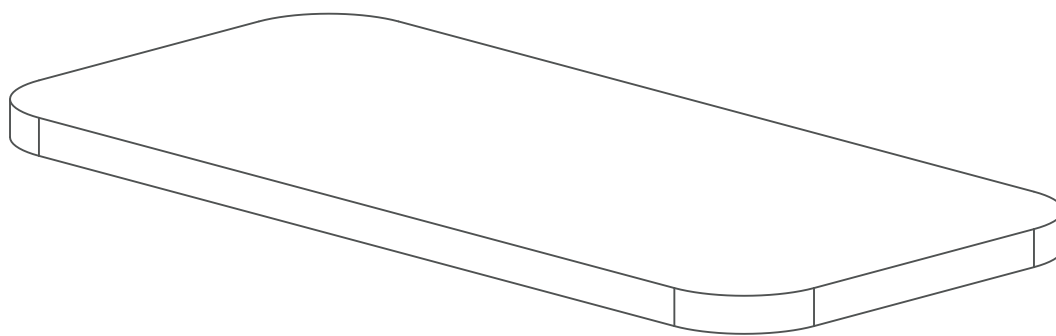

01

Dimensions

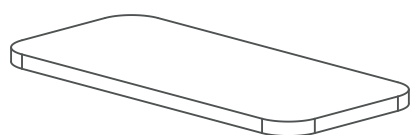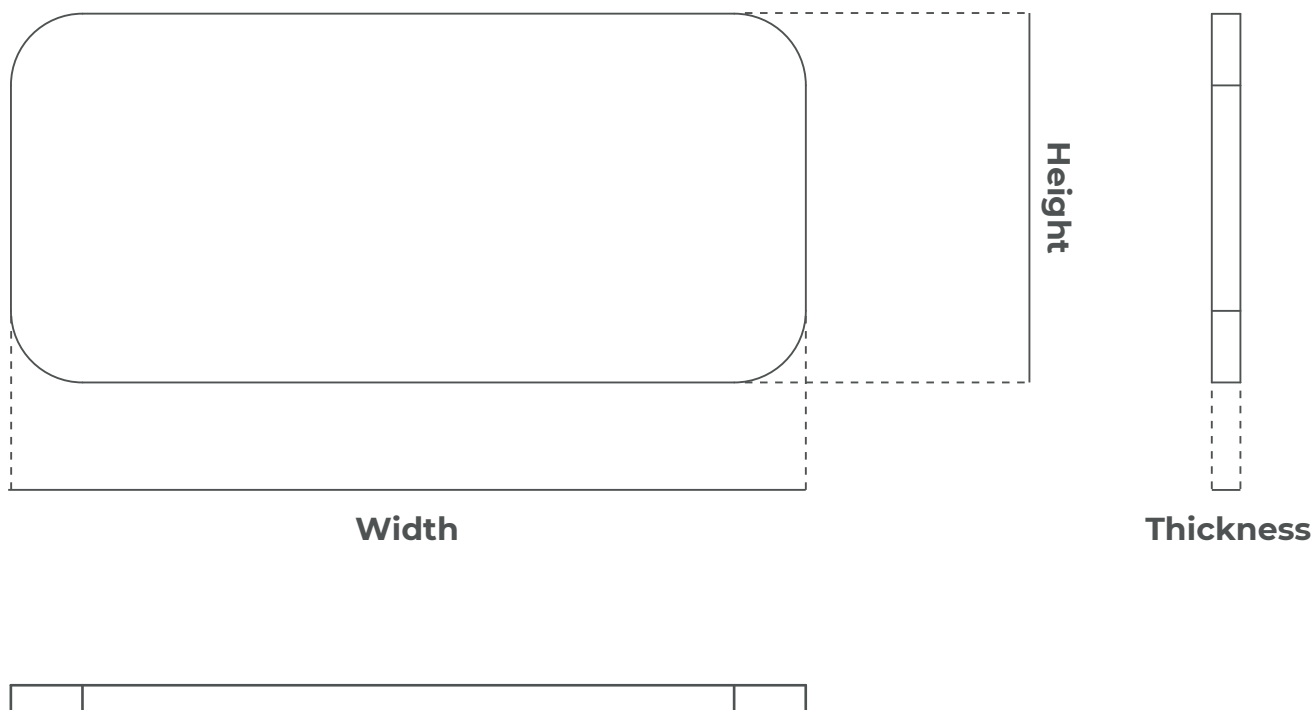

Myriad Dimi

Width: 555 mm Height: 257 mm Thickness: 20 mm
Width: 555 mm Height: 257 mm Thickness: 40 mm


02

Finishes




Composition 100% Polyester
Weight 200 gr/m²
Thickness 1,75 mm
Colour Fastness to light EN ISSO 105-B02: 6-7
Flame Retardancy EN 13501-1: B-s1,d0
Abrasion resistance 50 000 Cycles
STANDARD 100 by OEKO-TEX®

Felt Finish
Pearl




Composition 100% Polyester
Weight 200 gr/m²
Thickness 1,75 mm
Colour Fastness to light EN ISSO 105-B02: 6-7
Flame Retardancy EN 13501-1: B-s1,d0
Abrasion resistance 50 000 Cycles
STANDARD 100 by OEKO-TEX®

Felt Finish
Storm




Composition 100% Polyester
Weight 200 gr/m²
Thickness 1,75 mm
Colour Fastness to light EN ISSO 105-B02: 6-7
Flame Retardancy EN 13501-1: B-s1,d0
Abrasion resistance 50 000 Cycles
STANDARD 100 by OEKO-TEX®

Felt Finish
Indigo Blue




Composition 100% Polyester
Weight 200 gr/m²
Thickness 1,75 mm
Colour Fastness to light EN ISSO 105-B02: 6-7
Flame Retardancy EN 13501-1: B-s1,d0
Abrasion resistance 50 000 Cycles
STANDARD 100 by OEKO-TEX®

Felt Finish
Pewter




Composition 100% Polyester
Weight 200 gr/m²
Thickness 1,75 mm
Colour Fastness to light EN ISO 105-B02: 6-7
Flame Retardancy EN 13501-1: B-s1,d0
Abrasion resistance 50 000 Cycles
STANDARD 100 by OEKO-TEX®

Felt Finish
Lemon




Composition 100% Polyester
Weight 200 gr/m²
Thickness 1,75 mm
Colour Fastness to light EN ISO 105-B02: 6-7
Flame Retardancy EN 13501-1: B-s1,d0
Abrasion resistance 50 000 Cycles
STANDARD 100 by OEKO-TEX®

Felt Finish
Ruby



Composition 100% Polyester
Weight 200 gr/m²
Thickness 1,75 mm
Colour Fastness to light EN ISO 105-B02: 6-7
Flame Retardancy EN 13501-1: B-s1,d0
Abrasion resistance 50 000 Cycles
STANDARD 100 by OEKO-TEX®

Felt Finish
Kelly



Composition 100% Polyester
Weight 200 gr/m²
Thickness 1,75 mm
Colour Fastness to light EN ISO 105-B02: 6-7
Flame Retardancy EN 13501-1: B-s1,d0
Abrasion resistance 50 000 Cycles
STANDARD 100 by OEKO-TEX®

Felt Finish
Cerulean