



## GlueArt 2.0

**Fixing Systems**  
RESIDENTIAL & Hi Fi  
PRO AUDIO & STUDIO

### Specifications

**1 Tube unit** | One Tube installs either 8 flat foam panels (Agad, Thor, Myron E, etc.) or 8 nestled foam panels (framed absorbers)diffuser)

**1 Box** | Each box contains 12 tubes. One Box installs either 96 flat foam panels (Agad, Thor, Myron E, etc.) or 96 nestled foam panels (framed absorbers)

GlueArt 2.0 is a polymer-based glue, specifically designed to bond to acoustic foam and EPS. POP is a polymer with superior adhesive efficiency, with double the initial tack of the GlueArt 1.0. it presents higher durability, faster bonding, and is completely humidity-resistant. It is applicable on a vast range of surfaces, including cement, painted surfaces, stone, wallpaper, plasterboard, wood, chipboard, PVC, expanded plastic, mineral fibres and metal. It is also resistant from -40 to 90°C.

GlueArt 2.0 is especially easy to use, gluing lighter panels such as Myron E practically instantly. Heavier panels, although requiring initial support, start to bond after just 10 minutes, bonding with a safety factor of over 10.



### Description

Our new GlueArt formula has several improvements over the previous version:

- Glues faster
- Bonds perfectly with EPS (Myron diffuser) and foam
- Humidity proof
- Adheres to virtually any surface
- Non-flammable and non-irritant to skin. Does not release harmful vapours.
- Has double the tack force of our previous GlueArt formula.
- It glues Myron diffusers almost instantly.
- Even though it will be necessary to initially support our heavier panels it is possible to glue any Artnovion panel with our new GlueArt
- Installs 30% more panels per tube of glue than the previous version.



hello@artnovion.com  
[www.artnovion.com](http://www.artnovion.com)



## GlueArt 2.0




**Fixing Systems**  
RESIDENTIAL & Hi Fi  
PRO AUDIO & STUDIO

### Instructions

1. Apply the adhesive to the back of the panel with a pressure gun. If applying to an extremely irregular surface, apply adhesive to both the panel and the target wall area.

2. Place the panel on the wall in the correct position for a maximum of 10 minutes after applying the glue.

Avoid making any adjustments to the panel after gluing so as not to reduce the glue force. The cure time depends on the application thickness, temperature, and air humidity.

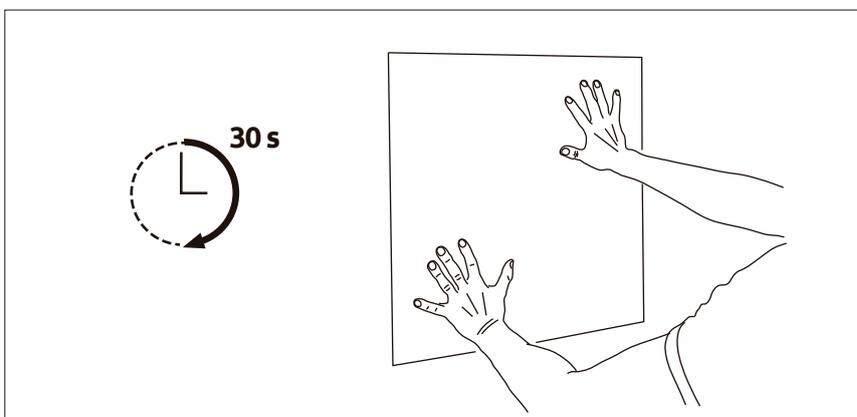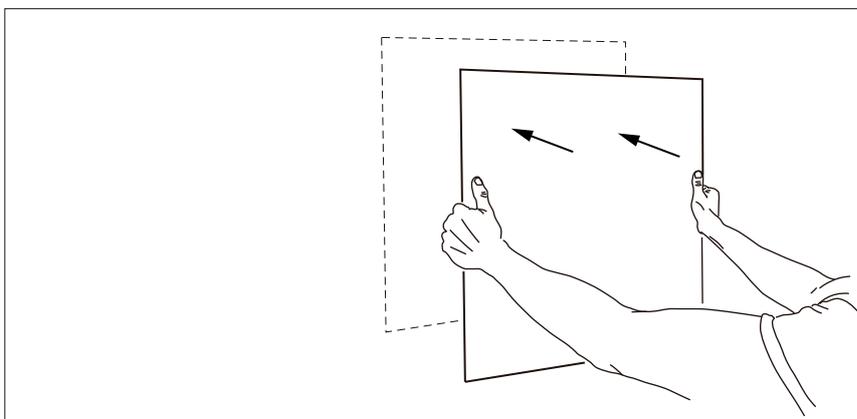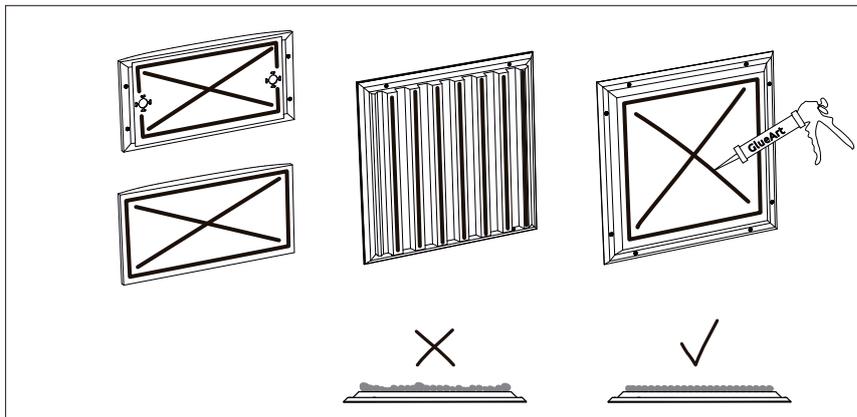

hello@artnovion.com  
www.artnovion.com