

dBa Door PM35R



Acoustic door in wood finish, supplied with surround and threshold with incorporated sealant system. Made from sheet steel with multilayer absorbent core. Fitted with a European-style cylinder with a Yale-type lock and Inox handles.


General Dimensions

Model*	Free passage dimensions (Wa x Ha mm)	Door dimensions (Wb x Hb mm)	Construction Span dimensions** (Wc x Hc mm)	Thickness (mm)	Weight (Kg)
dBa Door PM35R-1/800 (Single-leaf)	800x2000	940x2070	945x2075	52	68
dBa Door PM35R-1/850 (Single-leaf)	850x2000	990x2070	995x2075	52	72
dBa Door PM35R-1/900 (Single-leaf)	900x2000	1040x2070	1045x2075	52	75
dBa Door PM35R-1/950 (Single-leaf)	950x2000	1090x2070	1095x2075	52	79

*Custom dimensions available on request

**Check with tolerances of building materials and construction style


Schematics

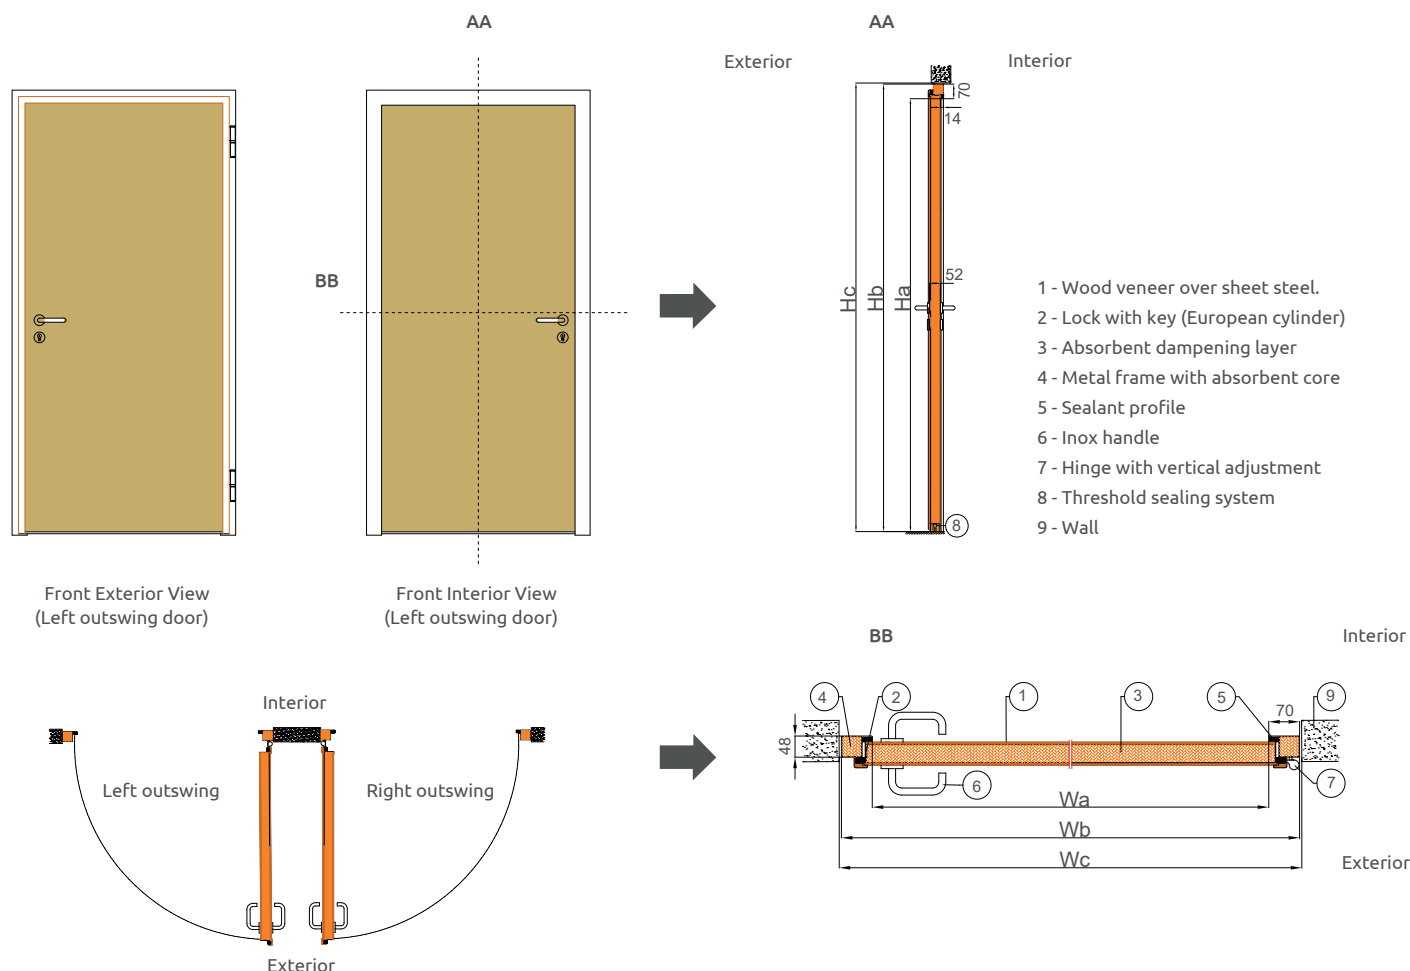

Note: Doors will open to the exterior by default (can be customized upon request)

dBa Door PM35R

Performance

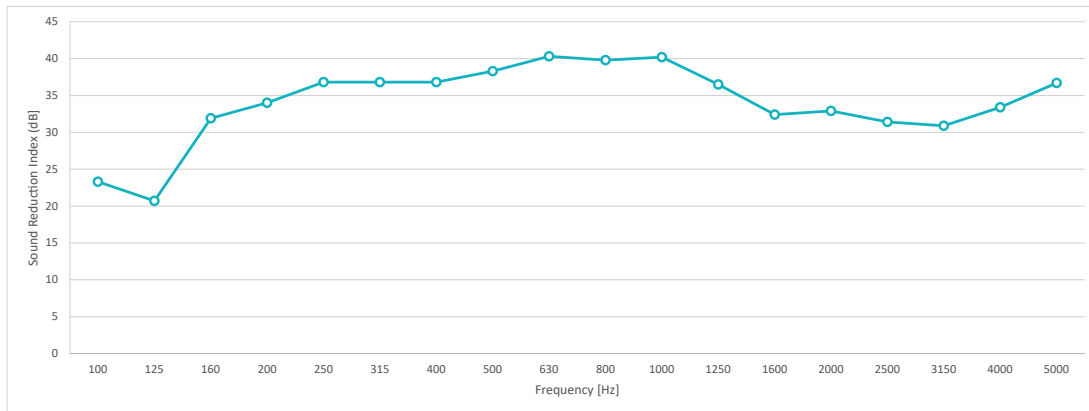

Rw = 35dB

The test results are in accordance with ISO-717-1:2009

Recommended applications

- Offices
- Meeting rooms
- Medical clinics
- Classrooms
- Hotel rooms
- Rooms where reasonable levels of acoustic isolation are required.

Accessories (under consultation):

- Anti-panic Bar
- Circular Viewport (300mm Diameter)
- Automatic Closing System

Finishes



Mogno Sapelli



Sucupira




Izombé




Vaporized Beech



Kambala



European Oak



White Primer Undercoat



Custom RAL